



## บันทึกข้อความ

คณะวิศวกรรมศาสตร์	
มหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย	
เลขรับ	1242
วันที่	28-02-2566
เวลา	09.14 น.

ส่วนราชการ ..... สำนักงานอธิการบดี มหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย  
โทร. ๐-๗๔๓๑-๗๑๐๐ ต่อ ๑๑๑๐ โทรสาร ๐-๗๔๓๑-๗๑๓๓

ที่ ..... อว ๐๖๕๕/ ๓๔๒ ..... วันที่ ๒๘ กุมภาพันธ์ ๒๕๖๖

เรื่อง ..... ขอนำส่งสำเนาหนังสือ เรื่อง ขออนุญาตตรวจสอบและซ่อมแซมเครื่องตรวจจับโลหะ  
..... แบบเดินผ่าน CEIA รุ่นที่ HI-PE Plus 11.39 น.

เรียน คณบดีคณะวิศวกรรมศาสตร์

ด้วย สำนักงานอธิการบดี ขอนำส่งสำเนาหนังสือโรงพยาบาลจิตเวชสงขลาราชนรินทร์  
ที่ สธ ๐๘๓๔/๓๕๖ ลงวันที่ ๑๕ กุมภาพันธ์ ๒๕๖๖ เรื่อง ขออนุญาตตรวจสอบและซ่อมแซม  
เครื่องตรวจจับโลหะแบบเดินผ่าน CEIA รุ่น HI-PE Plus 11.39 น. มายังคณะวิศวกรรมศาสตร์ เนื่องจาก  
มหาวิทยาลัย ฯ มอบคณะวิศวกรรมศาสตร์พิจารณาให้ความอนุเคราะห์จัดส่งบุคลากรหรือนักศึกษา  
ตรวจสอบและซ่อมแซมเครื่องตรวจจับโลหะดังกล่าว นั้น

ทั้งนี้ สามารถสอบถามข้อมูลเพิ่มเติมได้ที่ผู้ประสานงานของโรงพยาบาลจิตเวชสงขลา  
ราชนรินทร์ ดังรายละเอียดเอกสารแนบ

จึงเรียนมาเพื่อพิจารณา

(ผู้ช่วยศาสตราจารย์ขวัญหทัย ใจเปี่ยม)

รองอธิการบดี ปฏิบัติราชการแทน

อธิการบดีมหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย

เรียน คณบดี

-เพื่อโปรดพิจารณา

สำนักงานอธิการบดี ขอนำส่งสำเนาหนังสือ เรื่อง ขออนุญาต

ตรวจสอบและซ่อมแซมเครื่องตรวจจับโลหะ แบบ

เดินผ่าน CEIA รุ่นที่ HI-PE Plus 11.39 น.

1/3/2566

มณ. ผอ. ปร. เสนอ สรช  
ที่แจ้งของ

ศ ๕๑. ๑๑

พร. รองอธิการบดี



ที่ สธ ๐๘๓๔/๓๕๖

มหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย

ฉบับ 735  
วันที่ 21 ก.พ. 2566  
เวลา 09.58 น.

โรงพยาบาลจิตเวชสงขลาราชนครินทร์  
๔๗๒ ถนนไทรบุรี ตำบลบ่อทราย  
อำเภอเมืองสงขลา จังหวัดสงขลา ๙๐๐๐๐

๑๕ กุมภาพันธ์ ๒๕๖๖

สอ.(วิชาการ) 334

21 ก.พ. 2566

เรื่อง ขอบความอนุเคราะห์ตรวจสอบและซ่อมแซมเครื่องตรวจจับโลหะแบบเดินผ่าน CEIA รุ่น HI-PE Plus 11.39 น.

เรียน อธิการบดี มหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย

สิ่งที่ส่งมาด้วย รายละเอียดคุณลักษณะเฉพาะสำหรับเครื่องตรวจจับโลหะแบบเดินผ่าน CEIA รุ่น HI-PE Plus จำนวน ๘ หน้า

ด้วยโรงพยาบาลจิตเวชสงขลาราชนครินทร์ ได้จัดซื้อเครื่องตรวจจับโลหะแบบเดินผ่าน CEIA รุ่น HI-PE Plus รายละเอียดตามสิ่งที่ส่งมาด้วย โดยใช้งานมาแล้ว ๕ ปี ปรากฏความชำรุดบกพร่อง กล่าวคือ เครื่องส่งเสียงเตือนแม้ไม่มีโลหะลอดผ่านและไม่ส่งเสียงเตือนเมื่อมีโลหะลอดผ่าน และทางโรงพยาบาลฯ ไม่สามารถจัดหาบริษัทเอกชนที่เชี่ยวชาญในพื้นที่จังหวัดสงขลา มาเพื่อดำเนินการตรวจสอบและซ่อมแซมได้

โรงพยาบาลจิตเวชสงขลาราชนครินทร์ เล็งเห็นว่ามหาวิทยาลัยเทคโนโลยีราชมงคลศรีวิชัย มีบุคลากรและนักศึกษาที่มีความรู้ ความสามารถและประสบการณ์สูงในด้านวิศวกรรมศาสตร์ จึงขอความอนุเคราะห์ จัดส่งบุคลากรหรือนักศึกษา มาเพื่อตรวจสอบและซ่อมแซมเครื่องตรวจจับโลหะรายการดังกล่าว ทั้งนี้ได้มอบหมาย ให้นายชญาณนท์ สุวรรณชัย ตำแหน่งนักวิชาการพัสดุชำนาญการ หมายเลขโทรศัพท์ ๐๘ ๖๙๖๔ ๔๑๕๒ เป็นผู้ประสานงาน

จึงเรียนมาเพื่อโปรดพิจารณา ผลเป็นประการใดกรุณาแจ้งให้ทราบด้วย จะเป็นพระคุณ

ขอแสดงความนับถือ

(นายอิทธิพันธ์ ชานีรัตน์)

ผู้อำนวยการโรงพยาบาลจิตเวชสงขลาราชนครินทร์

150 น. อธิพงษ์

ที่ ๑๖/๒๕๖๖

ด.ช. อธิพงษ์/๑๖/๒๕๖๖  
๑๓๐๐๗/๑๓๐๐๗

กลุ่มภารกิจอำนวยการ

กลุ่มงานพัสดุ

โทรศัพท์ ๐ ๗๔๓๑ ๗๔๖๔

โทรสาร ๐ ๗๔๓๒ ๓๒๐๒

มอบให้: อ. อธิพงษ์  
พัสดุ/๑๖/๒๕๖๖

22 ก.พ. ๖๖


# HI-PE Plus

## ENHANCED WALK-THROUGH MULTI-ZONE METAL DETECTOR

- Accurate Detection of magnetic, non-magnetic and mixed-alloy metal weapons
- 60 localization zones:
  - 20 vertical • 3 lateral
- High Discrimination and Throughput
- Compliant with and Certified to the Strictest Security Standards for weapons detection
- Exceptional Immunity to external interferences
- Unmatched Reliability
- Rapid Installation

### Applications

- ☒ Government Buildings
- ☒ Industries (Security)
- ☒ Nuclear Facilities (Security)
- ☒ Prisons (visitors)
- ☒ Public Events
- ☒ Amusement Parks
- ☒ Courts
- ☒ Cruise ships
- ☒ Data Processing Centers (EDP)
- ☒ Hotels
- ☒ Schools Security



[www.ceia.net](http://www.ceia.net)



**Threat Detection through Electromagnetics**

CEIA reserves the right to make changes in equipment, specifications, features, prices, and other details without notice. The price and availability of sales are subject to change without notice.

## HI-PE Plus Enhanced Multi-Zone Metal Detector

CEIA  
www.ceia.net

CEIA is proud to present the new HI-PE Plus Multi-Zone Metal Detector, a development of the well-established HI-PE model. Accurate detection of all metals, high level of discrimination, full compliance with the latest Security Standards and exceptional immunity to external interferences are among the main peculiarities of this new device.

### Features



- Capability to detect the full range of metal weapon threats even within body cavities




- Met-Identity technology for Identification of Threat Composition

The most advanced Security Standards require detection of all ferrous and non-ferrous metal weapons and of those constructed in special non-magnetic alloys. The HI-PE Plus detects firearms and knives of this type, even when they are hidden within body cavities, and accurately indicate the position of the threat, its intensity and its prevalent composition. Inspection personnel thereby acquire thorough knowledge of the metal item and can act, according to procedures, with maximum effectiveness and security.



- 60 pinpointing zones with high resolution & precision:
  - 20 Vertical
  - 3 Lateral

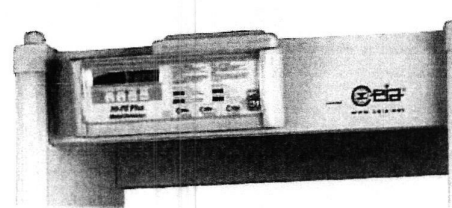

#### MET-IDENTITY TECHNOLOGY


With Met-Identity technology, the HI-PE Plus allows you to know where, how much and what type of metal is being brought into the secure area.



➤ FERROUS METAL

➤ NON FERROUS METAL

#### 60 LOCALIZATION ZONES with left, center and right indication

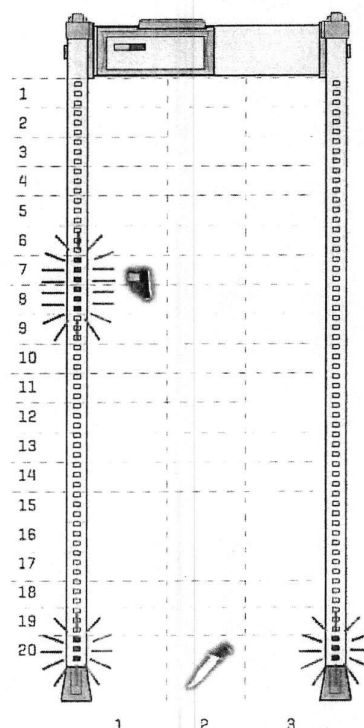



## Benefits



- Cutting-edge discrimination technology allows personal effects to be ignored, creating rapid transit flow

The transit volume magnetic scanning system, invented by CEIA and applied since production of the first zonal Metal Detectors in 1986, allows state-of-the-art detection and discrimination results. The HI-PE Plus has a very low nuisance alarm rate even at the strictest Security Levels requested today, and therefore allows high transit flow rates and the minimum need for intervention by inspection personnel.




## Unique Alarm Signalling



- 4 Multi-Zone Display Bars, each programmable as entry Stop/Go and/or local alarm indication
- High visibility of the control unit and the zone indication independent from the operator position and the installation environment

Accurate signaling is essential for best operation and flow management. The HI-PE Plus provides the user with fully-programmable signaling. Both entry-points can indicate with a high level of accuracy, even simultaneously, the vertical and lateral areas of transit of the threats detected, and can also be configured as 'traffic lights' to control transits through the detector.

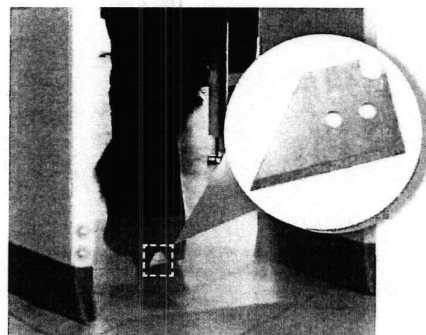

### 4 MULTI-ZONE DISPLAY BARS

Light bars indicate metal position vertically and laterally and can also show pacing lights.



- Flexible Acoustic Alarm Signaling System:
  - ☑ 10 Continuous and Pulsed Tones
  - ☑ 34 Special Sounds

- 10 Acoustic Intensity Levels

A complete acoustic alarm system allows personalization of the alarm tones and intensities, with a wide choice of continuous, pulsed and special tones at different levels of intensity. The wide volume control dynamic allows operation even in very noisy environments.



- High Precision Transit Counter:

- ☑ In-Bound Transits
- ☑ Out-Bound Transits
- ☑ Alarm Rate
- ☑ Automatic Compensation for repeated transits of the same person

The Metal Detector provides an automatic count of the people passing through the access point in both directions and the related nuisance alarm percentage.

### HIGH PRECISION TRANSIT COUNTER

Two photocells fitted into the archway allow counting of transits, alarms and percentage of alarms.



HI-PE Plus

## Enhanced Multi-Zone Metal Detector



### ■ Up to 50 built-in Security Programs

- ☒ Up to 30 International Standards
- ☒ Up to 20 Customizable Levels

Setting the Security Levels could not be easier and more versatile than in the HI-PE Plus. Users can choose directly from the known International Standards or request implementation of a Standard personalized to their own requirements. Users can also create their own work program and save it in internal memory provided for the purpose.



### ■ Chip Card system for fast, simple and secure parameter changes [i.e. alarm volume and tone, counter reading, etc...] and security level selection

One unique characteristic of the CEIA Metal Detectors is the chip-card system, which allows the Head of Security to set the Security Level quickly, reliably and without having to program the device in any way.



### ■ Any security standard can be enhanced with selectable random alarm probability



### ☒ CHIP CARD SYSTEM

*Chip Card for automatic selection of Security Levels and parameter changes.*

## Rapid Installation



### ■ One touch guided automatic installation (OTS)

Innovative function assisting the installation through an automatic step-by-step procedure



### ■ Continuous self diagnostics assures monitored performance reliability


### ■ Exceptional immunity to environmental interferences makes the Metal Detector easy to use even when electrical noise is encountered.

## Communication Capabilities



TYPE OF OPERATION	Ethernet	USB	Infrared	Bluetooth	RS-232
Maintenance	○	○		■	■
Remote Control	○		■	■	■
Remote Data collection	○				

■ STANDARD ○ OPTION

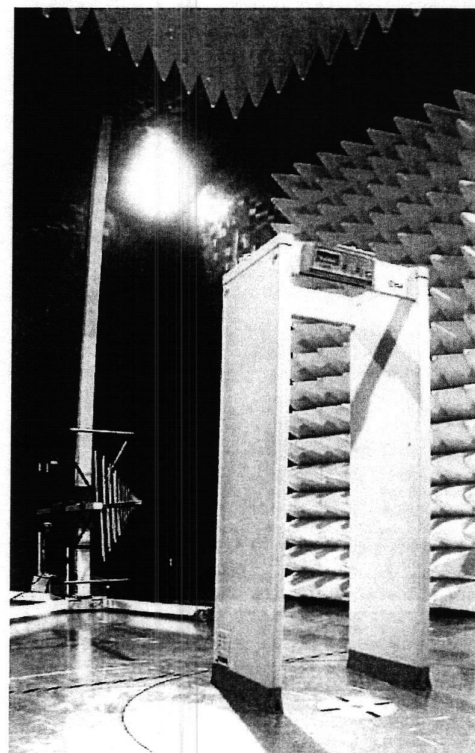


## Model Configuration

Features	HI-PE Plus/PZ
Compliant with the strictest detection and discrimination standards for EMDs (Enhanced Metal Detectors)	■
4 display bars each programmable as zone indicators and/or pacing lights	■
60 localization zones (20 vertical x 3 lateral) with left, center and right indication	■
Chip Card Reader	■
Bluetooth, infrared and RS-232 communication	■
High precision transit counter	■
Programmable Random Alarm capability	■
3-Level Password and hardware key access protection	■
Met-Identity technology (separate Ferrous and Non-Ferrous alarm signaling)	■
One Touch Automatic Self Installation (OTS)	■
Automatic Operational Functional Verification (OFV)	■
Automatic Vibration Compensation (AVS, EVA)	■
Automatic Channel Search (CS)	■
Automatic Floor Gain Adjustment (FGA)	■
Automatic Technical Functional Verification (TFV)	■
Automatic Environmental Noise Compensation (ENA)	■
Powered by safe low voltage DC	■
Anti-tamper on/off switch	■
Integrated web-server & logger (includes Ethernet and USB interface)	○
Weather resistant protection	○
Anti-vandalism, anti-tampering protection	○
IP65 protection (includes weather resistant and anti-vandalism options)	○
Embedded battery charger and under-voltage protection	○
Long life crossbar battery back-up	○
820 mm useful passage width	○

■ STANDARD ○ OPTION

## Dimensions [mm]

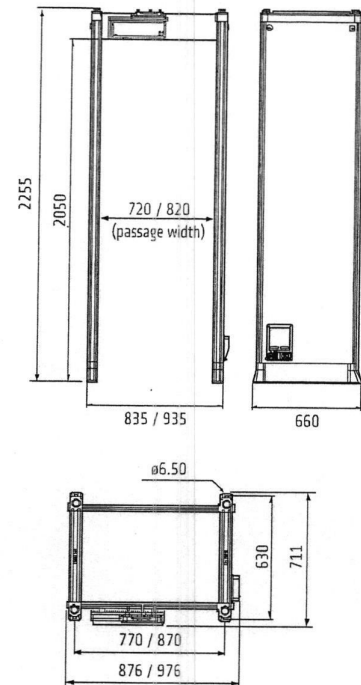

### UNDER THE ALARM THRESHOLD

■ Small metal mass  
■ Medium metal mass

### OVER THE ALARM THRESHOLD

■ Medium metal mass  
■ Large metal mass

Green and Red Metering Signals  
Proportional to the Metal Mass  
Detected

## Hi-PE Plus



### Enhanced Multi-Zone Metal Detector

#### Options / Upgrade Kits

##### ➤ Weather Resistant Protection



Kit for upgrading the standard version to outdoor applications according to IEC 60950-22; this kit includes shelters, crossbars, protection covers for power supply and IP67 mains power supply adapter.

- 720 mm passage width (part # 55630)
- 820 mm passage width (part # 55633)



##### ➤ Anti-vandalism, Anti-tampering Protection

This option includes stainless steel control unit, IP67 mains power supply adapter, protection covers for power supply and antenna connection compartments, equipped with screws requiring tools for removal. Part # 55629



##### ➤ IP65 Protection

This option includes the Weather Resistant and Anti-vandalism kits.

- 720 mm passage width (part # 55631);
- 820 mm passage width (part # 55632)


##### ➤ 820 mm Useful Passage Width

Part # 55635

##### ➤ Long life crossbar battery back-up

Crossbar battery back-up in stainless steel case. Provides up to 8 hours of autonomous working time.


Part # 55681

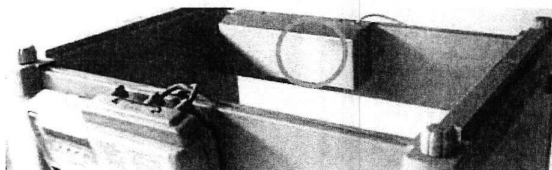

##### ➤ Embedded Battery Charger and Under-voltage Protection

Anti-tamper on/off switch, RS-232 interface, battery charger with 12 hours mains disconnection diagnostic alarm.



Part # APSM2Plus/P



##### ➤ Integrated Web-server & Logger, Battery Back-up and Charger

Anti-tamper on/off switch, RS-232, USB, 10/100 baseT Ethernet interface, data logger, real-time clock, integrated web-server, transit statistical data analysis, 20' internal battery back-up with 12 hours mains disconnection diagnostic alarm.

Part # APSIM2Plus/P





## Accessories


### ➤ Chip Cards

Chip cards for simple and secure selection of Security Levels and parameter setting. List of chip-cards available on request.



### ➤ RCU2

Control unit for full remote access, including alarm signaling and programming of CEIA Walk Through Metal Detectors (part # RCU2). The connection is performed via bluetooth (standard) or via cable connection (part # 3618).




VISUAL ALARM WITH ZONE INDICATION

### ➤ MBSU-2

Independent, compact size, long life power supply in weatherproof stainless steel case, with embedded fast charger:

- 14 hours typical (10 hours minimum) continuous operation with HI-PE Plus
- 5 hours typical charging time.


Part # MBSU-2



### ➤ MD-Scope

Powerful, PC based installation and service software. Includes oscilloscope and terminal functionality (part # MD-SCOPE2).

The connection is performed via bluetooth (standard) or via cable connection (part # 3805).




### ➤ IRC-1

Infrared Remote Controller for wireless remote programming of the control unit.  
Part # 47180



### ➤ Metal Detector Divesting Table FOR MANAGEMENT OF PERSONAL METAL BELONGINGS

- Standard length: 610 mm (Part # 18074)
- Extended length: 1200 mm (Part # 39491)



### ➤ Upper Connection Module

This extension cable allows the connection of power supply and serial communication to personal computers or CEIA accessories, such as RCU-2. Part # 46650




### ➤ RRU

Remote relay unit (RRU) to repeat the detection alarms of the gate through a relay contact. The RRU module can be used for integration of the Metal Detector in interlocked door systems. Part # RRU

### ➤ Stainless Steel Deck Dolly

FOR LOCAL MOVING OF THE PANEL METAL DETECTOR GATE

- Robust construction in AISI 316L stainless steel
- Rubber-covered castor-type wheels for easy movement
- Incorporated handles for transport (available only for 720 mm useful passage width: part # 50789)



### ➤ IP67 Mains Power Supply

100W IP67 power supply for heavy duty applications. Vandal resistant. It is provided with flanges for simple installation.  
Part # 43564



### ➤ ID-Holder

This accessory is designed to be hung on a crossbar of the archway, either at the entrance or the exit side. It can hold, for instance, a notice or an ID number for waiting people or for the screener.

Part # 54095



### ➤ Test Samples Kit

Reference Samples for accurate verification of the Security Level. Includes guided procedures and certificate of calibration.

- Part # EMD-SK-GAL
- Part # EMD-SK-GDML



Hi-PE Plus

## Enhanced Multi-Zone Metal Detector

### Specifications

KEY FEATURES	Wide range of threat detection from guns to 1/2 cutter blade	Automatic Environmental Noise Compensation (ENA)
	Excellent discrimination of personal metal effects	Met-Identity technology identifies and signals the metal type in real time
	60 localization zones (20 vertical x 3 lateral) with left, center and right indication	High precision bidirectional counter with automatic rescreening compensation
	One touch automatic self installation (OTS)	Chip Card capability for fast, simple, and secure programming
	Automatic Operational Functional Verification (OFV)	Random alarm capability programmable from 0% to 100%
	Automatic Vibration Compensation (AVS,EVA)	Exceptional Immunity to external interferences
	Automatic Channel Search (CS)	Powered by safe low voltage DC
	Automatic Floor Gain Adjustment (FGA)	Standard Interfaces: RS-232, Bluetooth, Infrared
QUALITY	Automatic Technical Functional Verification (TFV)	Other available interfaces: Wi-Fi, Ethernet, USB
	Continuous self diagnostic system	
	Proven reliability	
	No periodic re-calibration and preventive maintenance required	
	No scheduled maintenance	
	Fully digital design	
WALK-THROUGH GATE STRUCTURE	State-of-the-art, robust and washable panels	
	Protected against aging, weather and wear	
CENTRAL CONTROL UNIT	Ergonomic and robust design	
	High visibility alphanumeric display and programming keyboard	
	Made of advanced plastics or stainless steel and anti-vandalism construction (option)	
	Access to the front panel protected by hardware key and 3 levels of passwords	
ALARM SIGNALING	VISUAL SIGNALS	Multi-zone display bar for "height on person" localization 4 light bars with selectable entry/exit and pacing indication Green and red metering signals proportional to the mass of the detected target
	AUDIO SIGNALS	10 selectable continuous and pulsed tone plus 34 special tones 10 selectable sound intensities ranging from 0 to 90 dbA at 1m
TYPE OF SIGNALING	VISUAL	Fixed or proportional to the mass in transit - visible from 6m under lighting of 4000lux
	VISUAL ZONE INDICATION	60 distinct zones (20 vertical x 3 lateral) entry and exit side
PROGRAMMING	Up to 50 built-in security programs (up to 30 International Standards, up to 20 Customizable Levels)	
	Remote via RS-232, Infrared Remote Control Unit, Bluetooth or Ethernet 10/100 base T (option) interface	
	SECURITY LEVEL	International Standard (IS) command Chip card
	Local by Control Unit alphanumeric display and keyboard	
OPERATIONAL FEATURES	Programming and chip card access protected by user and super-user passwords	
	Very high discrimination and transit flow rates five or more times greater than other metal detection systems	
	Quick reset time as short as 0.2 seconds for high throughput rate	
	Very high detection speed (up to 15 m/sec.)	
	Built-in operational functional verification	
	One-touch key reading of inbound, outbound and Security Level Data	
INSTALLATION DATA	Automatic synchronisation between two or more metal detectors with distance of down to 5 cm without the use of external cables	
	Automatic Installation function (OTS)	

### Environmental Data

- POWER SUPPLY: 100...240V~ -10/+15%, 47...63Hz, 40 VA max
- OPERATING TEMPERATURE: -20°C to +70°C (-37°C to +70°C upon request)
- STORAGE TEMPERATURE: -37°C to +70°C
- RELATIVE HUMIDITY: 0 to 95% (without condensation)

### Certification and Compliance

- Compliant with and certified to the applicable Standards for Enhanced Metal Detectors (EMD)
- Compliant with the applicable electromagnetic Standards on Human Exposure and Pacemaker Safety
- Compliant with all Airport Security Standards worldwide
- Compliant with applicable International Standards for electrical safety and EMC
- Harmless to magnetic media (CD, tapes, etc.)

### Comprehensive support

CEIA PROVIDES FULL OPERATIONAL AND TECHNICAL TRAINING SUPPORT BY CERTIFIED PERSONNEL EITHER AT CEIA FACILITY OR AT CUSTOMER PREMISES

- phone technical support
- in-house and on-site repair/services
- standard and custom training



Zona Industriale 54/G, 52041 Vicinaggio - Arezzo [ITALY]

Tel.: +39 0575 4181 Fax: +39 0575 418298 E-mail: infosecurity@ceia-spa.com

DP060K0061V2000UK-64093

www.ceia.net

CEIA reserves the right to make changes in the product and price without notice. The information provided in this brochure and online is for informational purposes only.

